

## SPECIFICATIONS

Thermodynamic Cycle	Diesel 4 stroke
Air Handling	TAA
Arrangement	6L
Bore x Stroke (mm)	104 X 132
Total Displacement (l)	6,7
Valves per cylinder (n°)	4
Cooling System	liquid
Direction of Rotation (viewed facing flywheel)	CCW
Compression ratio	17.5 : 1
InjectionSystem	ECR


## PERFORMANCE

Rated power [*] (kW (HP) @ rpm)	175 ( 238 ) @ 2200
Peak torque (Nm (kgm) @ rpm)	1020 ( 104 ) @ 1500
High idle speed (rpm)	-
Low idle speed (rpm)	-

Minimum starting temperature without auxiliaries (°C)	-15 °
Oil and oil filter maintenance interval for replacement [***] (hours)	600

## STANDARD CONFIGURATION

Flywheel housing (type)	SAE 3 - cast iron
Flywheel size (inch)	11,5"
Intake manifold location	left side / frontwards
Exhaust manifold location	middle high / right side / frontwards
Turbocharger	fixed geometry
Turbocharger location	middle high / right side
Fan transmission ratio	1.4 : 1
Distance between fan - crankshaft centers (mm)	X = 0 Y = 296
Fuel filter (n°)	single cartridge - left side
Fuel prefilter	included
Fuel Pump	high pressure pump (H.P.P.)
Oil filter (n°)	single cartridge - right side
Oil sump	suspended sheet steel / front sump, 35° angularity limits continuous in all directions
Oil vapours blow-by circuit	on gear housing / Mann & Hummell valve
Oil heat exchanger	incorporated into the block
Oil filler	on valve cover
Lift pump	mechanical - incorporated in the H.P.P.
Starter	24 V - 4 kW
Alternator	24 V - 70 A with W contact
Engine stop device	-
Wiring harness	interface wiring loom with accessories
Painting color	grey

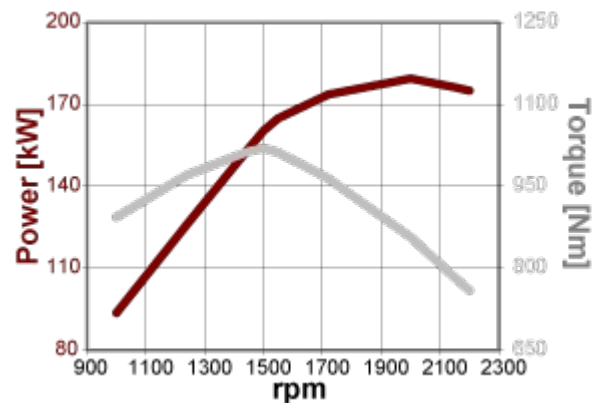

## WEIGHT AND DIMENSIONS



## NOT INCLUDED IN STANDARD CONFIGURATION

Power Take Off (PTO)	-
PTO - transmission ratio	1.03 : 1
PTO - maximum available torque	SAE A 100 Nm (9 teeth) - 150 Nm (11 teeth)
	SAE B 240 Nm (13 teeth)
Battery - minimum capacity recommended [*] (Ah)	130 Ah (24 V)
Battery - minimum cold cranking capacity recommended [*] (A)	500 A (24 V)

\* Power at flywheel according to 2004/26 EC (without fan), after 50 hours running, 3% tolerance, fuel Diesel EN 590.

\*\* Oil type: ACEA E3 - E5.

## Legend

<b>Arrangement</b> L (in line)	<b>Air Handling</b> TAA (Turbocharged with aftercooler) TC (Turbocharged) NA (Naturally Aspirated)	<b>Turbocharger</b> WG (Wastegate) VGT (Variable Geometry Turbocharger) TST (Twin Stage Turbocharge)	<b>InjectionSystem</b> M (Mechanical): ECR (Electronic Common Rail) EUI (Electronic Unit Injector)	<b>Emission Standard</b> EEV (Enhanced Environmentally friendly Vehicle)	<b>Exhaust System</b> EGR (Exhaust Gas Recirculation) SCR (Selective Catalytic Reduction)
-----------------------------------	---	---	---	---	---

FOR INFORMATION ON THE AVAILABLE RATINGS NOT LISTED IN THIS DOCUMENT PLEASE CONTACT THE FPT INDUSTRIAL SALES NETWORK OR VISIT OUR SITE [WWW.FPTINDUSTRIAL.COM](http://WWW.FPTINDUSTRIAL.COM)

FPT INDUSTRIAL OFFERS THE WIDEST AVAILABILITY OF ENGINE BUILD OPTIONS TO CUSTOMER SPECIFIC REQUIREMENTS WITHIN THE ENGINE SUPPLY. TO FIND OUT MORE ABOUT THE CONFIGURATIONS AND ACCESSORIES WHICH ARE AVAILABLE

[www.fptindustrial.com](http://www.fptindustrial.com)

